



8.

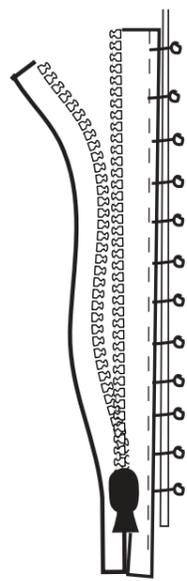

Pin one side of the zip in place RST with back bodice. Pin in place then hand tack to secure. Remove the pins. Change the machine foot to a zipper foot and stitch as close as possible to the zip teeth. Stitch as far down as you can. Repeat on the other side, making sure that the seams align when zip is closed.


10.

Snip Corners

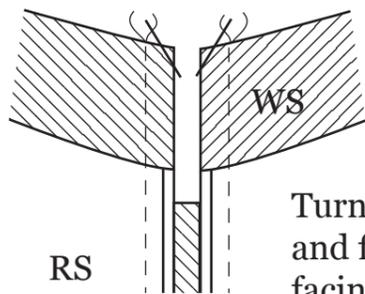


Turn the dress right way out and flip over with the back neck facing so it is lying over the top of the zipper tapes. Stitch down the side of each zipper tape. Trim top corners. Turn the facings through so they are back on the inside of the dress. Iron flat.

9.



Turn the dress inside out and from the last stitch you made on the zip (x), continue to stitch all the way down the back seam.

11.

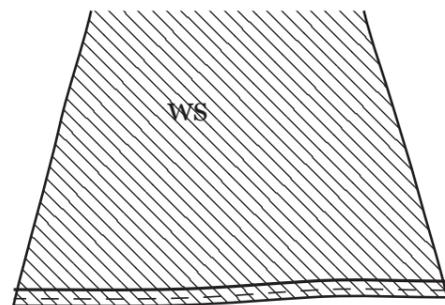

Now all you need to do is hem your skirt. Turn up 0.5cm iron flat and stitch close to the edge. Repeat and iron flat.

Finish.
Hoorah!

Instructions and Layplans

Ruby #003

Simple Sew
Sewing Patterns

MADE IN THE UK



FRONT



BACK

Key

Wrong Side


Right Side

Stitch Line

RST=right sides of fabric together

60 INCH WIDE FABRIC

LAYPLAN ALL SIZES

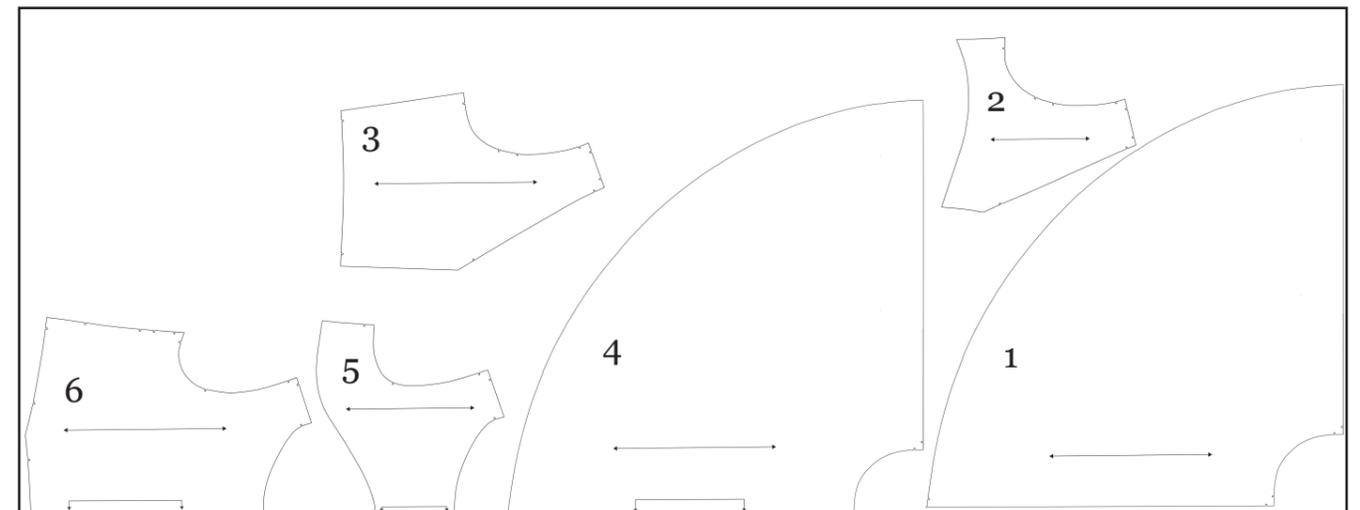

FOLD

Key

- Front Bodice= 6
- Back Bodice= 3
- Front Skirt= 4
- Back Skirt= 1
- Back Facing= 2
- Front Facing=5

Preparation

It is really important to launder your fabric (according to instructions) before you sew with it, this allows for shrinkage. On the pattern sheet there are labels you can cut out to pin onto your fabric pieces after you have cut them out to remind you which piece is which (handy if you cut out and leave to sew at a later date). You must then iron on fusible interfacing to the wrong side of facings (where required) and overlock, or zig zag stitch all raw edges, these are: bottom edge of facings, skirt and bodice side seams and the bottom edge of the skirt pieces.

Happy Sewing!

